


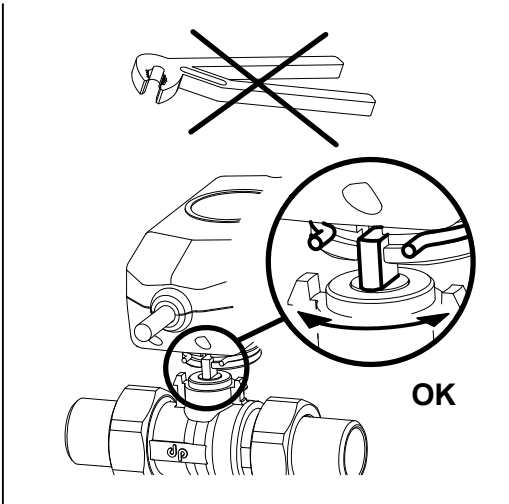




MOTORIZED COMPACT BALL VALVE FAST

1/2" - 3/4" - 1"
12" x 90°



OPERATING INSTRUCTIONS

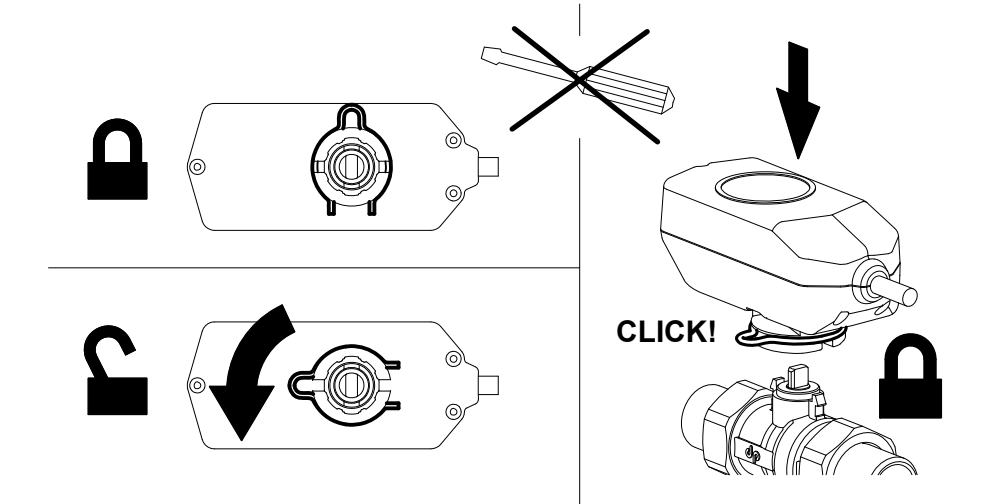


Ø	Ø	H	M	B	F	P
1/2"	3/4"	75	59	113	59	86
3/4"	1"		60	120	60	90
1"	1" 1/4	78	72	141	72	107







Ø	Ø	H	M	B	Q	R	F	P
1/2"	3/4"	75	59	113	29	56	59	86
3/4"	1"		60	120	30	60	60	90
1"	1" 1/4	78	72	141	35	70	72	107



Ø	Ø	H	M	B	Q	R	F
1/2"	3/4"	75	28	55	29	50	43
3/4"	1"		29	59	30	60	45
1"	1" 1/4	78	34	69	35	70	52




Ø	Ø	H	M	B	I
3/4"	1"	75	60	120	48 ÷ 60
1"	1" 1/4	78	72	141	52 ÷ 60

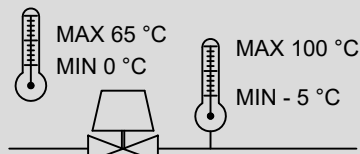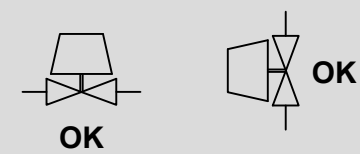



BEFORE INSTALLING THE VALVE
BE SURE THAT NO SOLID
RESIDUES, LIKE WELDING OR
THREADING RESIDUES, REMAIN
IN THE HYDRAULIC CIRCUIT

BODY VALVE
TECHNICAL FEATURES




UTILISABLE FLUIDS	WATER OR LIQUIDS COMPATIBLE WITH PTFE AND EPDM
FLUID TEMPERATURE FIELD	- 5 ÷ 100 ° C
MAXIMUM OPERATING PRESSURE	10 bar
MAXIMUM DIFFERENTIAL PRESSURE	4 bar

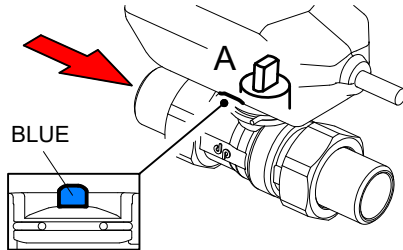



2 WAYS

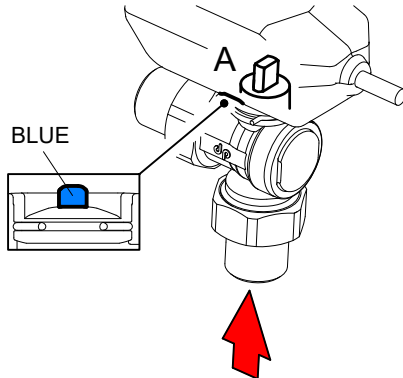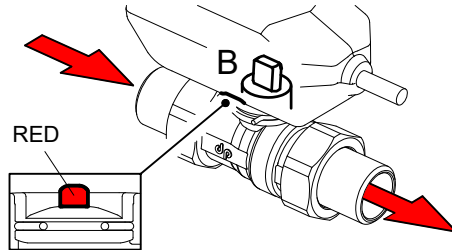



2 WAYS
SQUARE

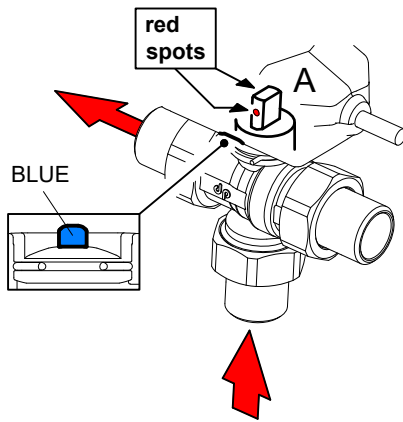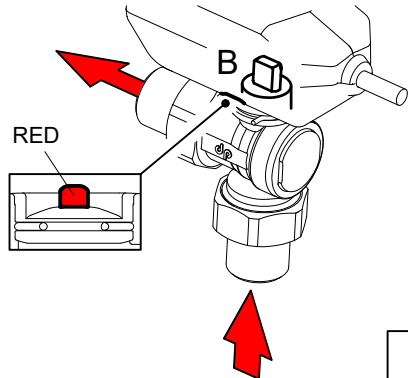


3 WAYS
"T" BORED

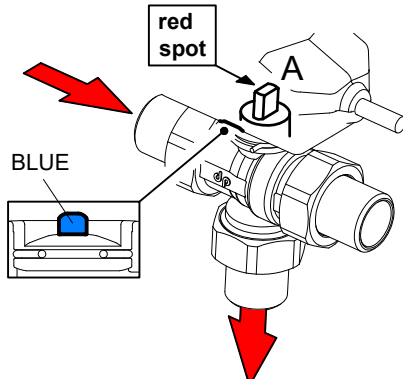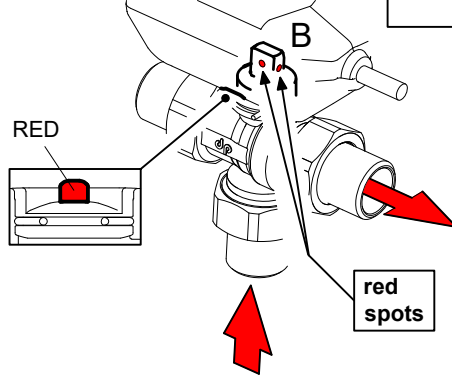


3 WAYS
LATERAL
DIVERTING

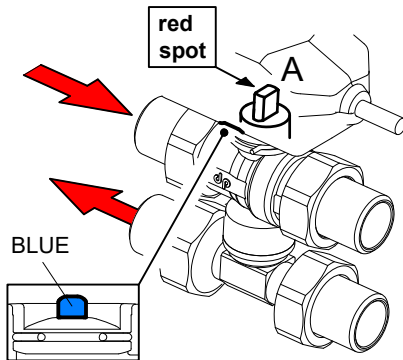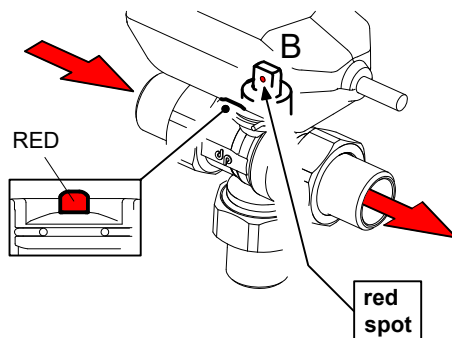


4 WAYS

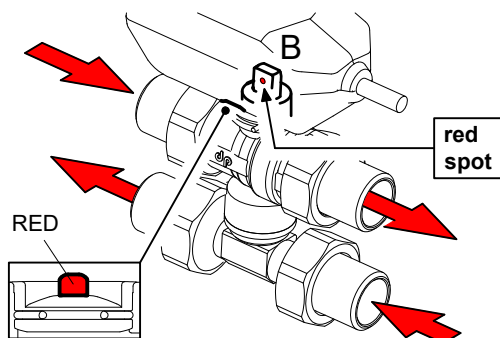


SERVOMOTOR TECHNICAL FEATURES				
	M2B	M2C	R2B	R2C
CONTROL TYPE	3 WIRES (C-NO-NC)		2 WIRES (RELAY INSIDE)	
SUPPLY VOLTAGE	230 V - 50 Hz	24 V - 50 Hz	230 V - 50 Hz	24 V - 50 Hz
POWER CONSUMPTION	4 W			
AUXILIARY SWITCH	MAX. 6 (2) A - 250 V			
OPERATION TIME	12 " x 90 °			
WORKING AMBIENT TEMPERATURE	0 ÷ 65 ° C			
ELECTRIC PROTECTION RATING	IP 54			
ELECTRIC CABLE	6 x 0.5 mm ² - 1 meter			

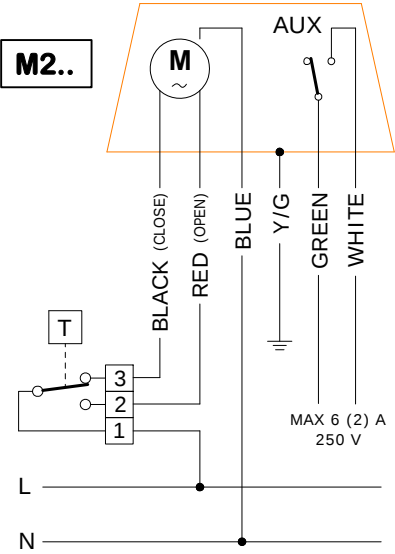


3 WIRES CONTROL

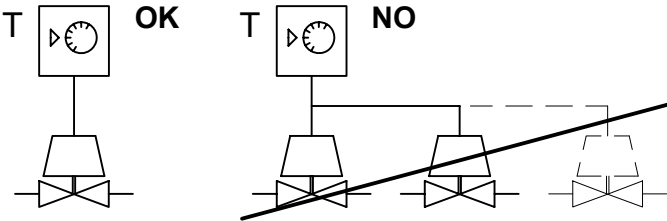

3 WIRES ACTUATORS CANNOT BE CONNECTED IN PARALLEL TO A SINGLE ROOM THERMOSTAT / CONTROL UNIT

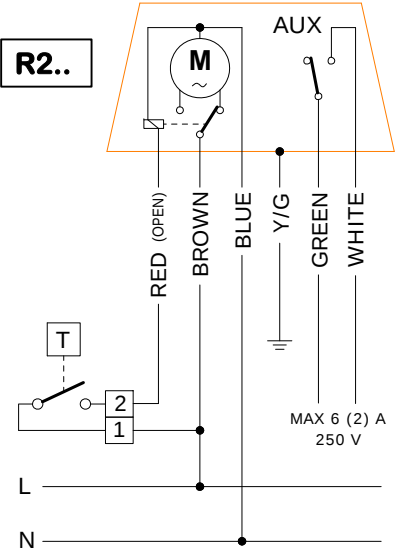


2 WIRES CONTROL

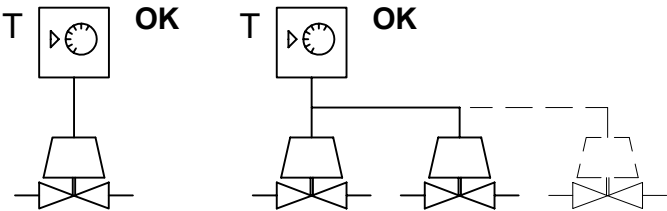


2 WIRES ACTUATORS CAN BE CONNECTED IN PARALLEL TO A SINGLE ROOM THERMOSTAT / CONTROL UNIT

AUXILIARY SWITCH

FREE VOLTAGE CONTACT MAX. 6 (2) A - 250 V

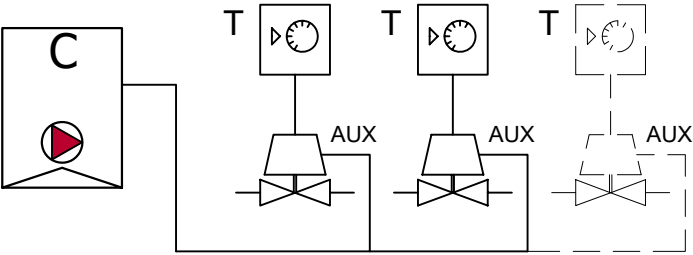

AUXILIARY SWITCHES OF DIFFERENT ACTUATORS CAN BE CONNECTED IN PARALLEL TO THE GAS BOILER. THE FIRST SWITCH CLOSING WILL START THE BOILER. THE LAST SWITCH OPENING WILL STOP THE BOILER.

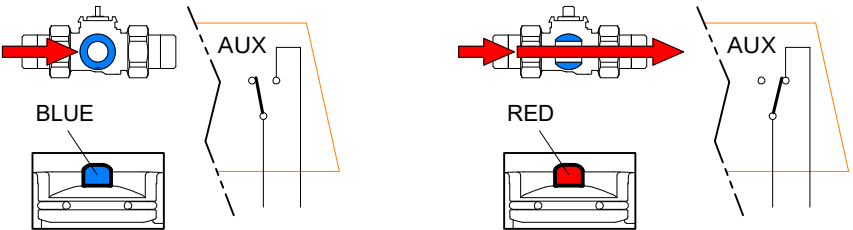

THE AUXILIARY SWITCH CLOSES WHEN THE VALVE IS IN OPENED POSITION (INDICATOR ON ACTUATOR IS RED)